

Painting your bilge

A freshly painted bilge is much easier to wipe down and keep clean, reducing the risk of odours that may result from unwanted residue. A clean bilge will also make it easier to find small parts or fastenings, which may have been dropped whilst working on your engine or other equipment.

Emil Langiewicz
Technical Support



1 Health and Safety

Before commencing preparatory work, ensure the area you are working in is adequately ventilated. Ensure you are wearing the correct PPE; we recommend safety spectacles, goggles or visors, nitrile rubber gloves, overalls (ensuring skin is not exposed) and a solvent mask or a respirator (if working in confined spaces).



➔ Before starting your project, **always check the weather conditions!** See Pages 18-19.

Previously painted surfaces:

2 Inspection


Check for areas of damage, separation or peeling, or any other indications that the existing coating is not firmly adhered to the substrate.



3 Preparation

In good condition

Clean with Super Cleaner and rinse with fresh water. Allow to dry. Sand smooth with 280-320 grade paper. Clean thoroughly and allow to dry completely. Continue at Step 5.

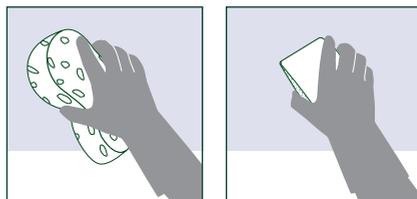

In poor condition

If previous finish is cracking, peeling or showing signs of separation from the substrate this should be totally removed.


➔ See Page 21 for advice on removing existing finishes.



Bare substrate:

4 Priming


Bare substrates should be primed to promote good adhesion and provide a smooth even surface, prior to applying Danboline. Your choice of primer will be dictated by the substrate; product recommendations are provided on labels and data sheets. Remember to pay particular attention to drying times and overcoating intervals.

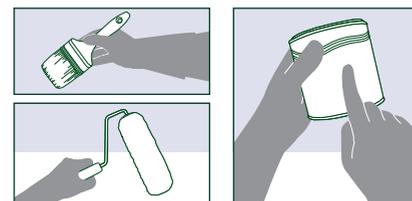

i Pay particular attention if the substrate is the reverse side of moulded GRP – this does not need to be primed.

5 Application

Sand the undercoat smooth with 180-280 grade paper and remove dust with a wipe or tack rag.

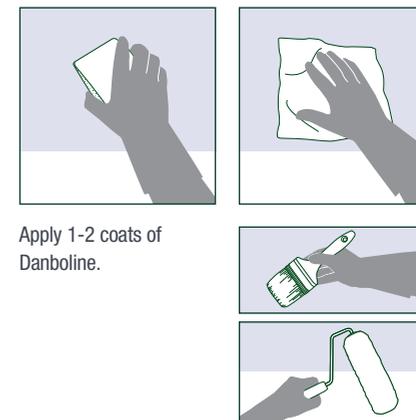

Apply 1-2 coats of Danboline.

i For added protection against moisture absorption and osmosis in bilge areas, use International Gelsield products – prior to applying Danboline – always follow the label instructions.

Preparing a non-slip deck

A deck demands a tough coating to protect it from everyday wear and tear. Where a non-slip surface is required International offers 3 alternative solutions.

Elodie Leonardi
Specialist in Retail Finishes Development



1 Health and Safety

Before commencing preparatory work, ensure the area you are working in is adequately ventilated. Ensure you are wearing the correct PPE; we recommend safety spectacles, goggles or visors, nitrile rubber gloves, overalls (ensuring skin is not exposed) and a solvent mask.



➔ Before starting your project, **always check the weather conditions!** See Pages 18-19.